

# 14th International Machine Vision and Image Processing Conference



14th International Machine Vision  
and Image Processing Conference:  
IMVIP 2010

Edited by

Martin J. Leahy and Marie-Louise O'Connell

**CAMBRIDGE**  
**SCHOLARS**  

---

**P U B L I S H I N G**

14th International Machine Vision and Image Processing Conference:  
IMVIP 2010,  
Edited by Martin J. Leahy and Marie-Louise O'Connell

This book first published 2011

Cambridge Scholars Publishing

12 Back Chapman Street, Newcastle upon Tyne, NE6 2XX, UK

British Library Cataloguing in Publication Data  
A catalogue record for this book is available from the British Library

Copyright © 2011 by Martin J. Leahy and Marie-Louise O'Connell and contributors

All rights for this book reserved. No part of this book may be reproduced, stored in a retrieval system, or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording or otherwise, without the prior permission of the copyright owner.

ISBN (10): 1-4438-2962-5, ISBN (13): 978-1-4438-2962-5

# TABLE OF CONTENTS

Foreword .....	viii
Chairs and Organizing Committee .....	ix
Program Committee and Reviewers .....	x
<b>Stereo Motion and Optical Flow</b>	
Stereo Images for 3D Face Applications: A Literature Review .....	2
<i>Claudia Arellano and Rozenn Dahyot</i>	
3D Optical Flow from Single and Dual Doppler Radars .....	17
<i>Yong Zhang, John L. Barron and Robert E. Mercer</i>	
<b>Medical Imaging</b>	
Simulated Wound Volume Measurement Using 3D Stereophotogrammetry .....	30
<i>Darren Thompson, Jill Cundell, David McDowell, and John Winder</i>	
Supervised Tissue Classification of Diabetic Foot Wound Images .....	44
<i>Darren Thompson, Philip Morrow, Bryan Scotney, Jill Cundell, and John Winder</i>	
Identification of Retinal Cones Using 3-D Modeling and Normalized Cross Correlation .....	59
<i>Alan Turpin, Philip Morrow, Bryan Scotney, Roger Anderson, and Clive Wolsley</i>	
Automatic Lung Nodule Detection from Chest CT Data Using Geometrical Features: Initial Results .....	75
<i>Tarik A. Chowdhury and Paul F. Whelan</i>	

Impact of Data Cleansing on the Registration Accuracy of 3D Stereophotogrammetry and 3D Computed Tomography.....	88
<i>Stuart Henry, Philip Morrow, Bryan Scotney, and John Winder</i>	

### **Image/Shape Representation and Recovery**

Comparing Hexagonal Image Resampling Techniques with Respect to Feature Extraction .....	102
<i>Bryan Gardiner, Sonya Coleman, and Bryan Scotney</i>	

Efficiently Scaling Edge Detectors.....	116
<i>Dermot Kerr, Sonya Coleman, and Bryan Scotney</i>	

EigenBody: Analysis of Body Shape for Gender from Noisy Images.....	131
<i>Matthew Collins, Jianguo Zhang, Paul Miller, Hongbin Wang, and Huiyu Zhou</i>	

Convexity based Perceptual Organization of Image Contours .....	145
<i>Padraig Corcoran, Peter Mooney, Adam Winstanley, and James Tilton</i>	

### **Cryptography and Steganography**

Analytics of Visual Cryptography .....	160
<i>Jonathan Weir and WeiQi Yan</i>	

Video Authentication: A Self Embedding Steganography Approach.....	174
<i>Pratheepan Yogarajah, Joan V. Condell, Kevin Curran, Paul Mc Kevit, and Abbas Cheddad</i>	

### **Tracking and Recognition**

<b>BEST PAPER AWARD</b> Automated Image-based Cell Tracking in Dense Cell Datasets .....	190
<i>Sha Yu and Derek Molloy</i>	

<b>BEST PAPER AWARD</b> Iris Texture and Fibre Pattern Can Affect Iris Recognition.....	207
<i>Deborah M. Rankin, Bryan W. Scotney, Philip J. Morrow and Barbara K. Pierscionek</i>	

Robust Feature Matching using the FESID Detector .....	220
<i>Dermot Kerr, Sonya Coleman, and Bryan Scotney</i>	

Analysis of Spatially-Aligned SURF Features for Pedestrian Classification .....	233
<i>Giuseppe Correnti, Sriram Varadarajan, and Jianguo Zhang</i>	

## **Segmentation**

Relative Depth Computation for Video Segmentation using Human Walking Motion.....	248
<i>Atul Nautiyal, Darren Mason and Kenneth Dawson-Howe</i>	

GPU-Based Complex-Background Segmentation Using Neural Networks .....	262
<i>Dubravko Ćulibrk and Vladimir Crnojević</i>	

## **Organization and Remote Sensing**

Content and Context Based Approach for Photographs Organizing in Events .....	276
<i>WeiQi Yan and Jonathan Weir</i>	

Towards Autonomous Safe Landing Site Identification from Colour Aerial Images.....	291
<i>Timothy Patterson, Sally McClean, Philip Morrow and Gerard Parr</i>	

## **Surveillance**

PixelGT: A New Ground Truth Specification for Video Surveillance ....	306
<i>Kenneth Dawson-Howe</i>	

A Framework for an Event Driven Video Surveillance System.....	320
<i>Declan Kieran and WeiQi Yan</i>	

## FOREWORD

On behalf of the organizing committee of the 2010 International Machine Vision and Image Processing Conference (IMVIP 2010) we extend a *c ad m le f ilte* – a hundred thousand welcomes – to all speakers and delegates. The University of Limerick, Ireland was proud to host this years event organized under the auspices of the Department of Physics and Energy.

This year marks the fourteenth in a series of IMVIP conferences that have provided a vital platform for communication and exchange between academics and industrialists from the numerous related disciplines involved in the processing of image based information over the last 14 years. These proceedings provide an overview of the 14th IMVIP conference presenting papers which reflect critical research within the field.

All papers submitted for presentation were evaluated and reviewed by our program committee members. Individuals whose papers were chosen for presentation at the conference submitted manuscripts to be published in these proceedings. The author of the paper with the highest score from the reviewers received the “Best Paper Award” at the conference.

We would like to thank all those who submitted papers for review and those who provided manuscripts for publication in these proceedings. We extend a special thanks to our reviewers and local organizers, whose effort and hard work reflect their commitment and dedication to the profession. We are grateful to our keynote speaker; Prof Joachim Weickert of the Mathematical Image Analysis Group at Saarland University in Saarbruecken, Germany for taking time out to present at our conference this year.

IMVIP 2010 was run in association with the Irish Pattern recognition and Classification Society (IPRCS), a member organization of the International Association of Patten Recognition (IAPR).

—Martin J. Leahy and Marie-Louise O’Connell  
University of Limerick  
Castletroy  
Limerick  
Ireland

# CHAIRS AND ORGANIZING COMMITTEE

IMVIP 2010

Conference Chairs

**Martin J. Leahy and Bryan Scotney**

Publication Chair

**Marie-Louise O'Connell**

Local Organizing Committee

**Carol Ryan**

**Amy O'Brien**

## PROGRAM COMMITTEE AND REVIEWERS

**Tom Arbuckle**, University of Limerick, Ireland  
**Donald Bailey**, Massey University, New Zealand  
**John Barron**, University of Western Ontario, Canada  
**Ahmed Bouridane**, King Fahd University, Saudi Arabia  
**Don Braggins**, Machine Vision Systems Consultancy, UK  
**Jon Campbell**, Letterkenny Institute of Technology, Ireland  
**Sonya Coleman**, University of Ulster, UK  
**Joan Condell**, University of Ulster, UK  
**Danny Crookes**, Queen's University of Belfast, UK  
**Rozenn Dahyot**, Trinity College Dublin, Ireland  
**Kenneth Dawson-Howe**, Trinity College Dublin, Ireland  
**Joey Enfield**, University of Limerick, Ireland  
**Bob Fisher**, University of Edinburgh, UK  
**John Ghent**, National University of Ireland, Maynooth, Ireland  
**Ovidiu Ghita**, Dublin City University, Ireland  
**Brian Hennelly**, National University of Maynooth, Ireland  
**Madonna Herron**, University of Ulster, UK  
**David Hogg**, University of Leeds, UK  
**Enock Jonathan**, University of Limerick, Ireland  
**Gerard Lacey**, Trinity College Dublin, Ireland  
**Martin Leahy**, University of Limerick, Ireland  
**Sally McClean**, University of Ulster, UK  
**Paul McCullagh**, University of Ulster, UK  
**John McDonald**, National University of Ireland, Maynooth, Ireland  
**Paul McKeivitt**, University of Ulster, UK  
**Paul McNamara**, University of Limerick, Ireland  
**Paul Miller**, Queen's University of Belfast, UK  
**Derek Molloy**, Dublin City University, Ireland  
**George Moore**, University of Ulster, UK  
**Philip Morrow**, University of Ulster, UK  
**Fionn Murtagh**, Royal Holloway University of London, UK  
**Tom Naughton**, National University of Ireland, Maynooth, Ireland  
**Marie-Louise O'Connell**, University of Limerick, Ireland  
**Peter J. Owens**, National University of Ireland, Galway, Ireland  
**Robert Sadleir**, Dublin City University, Ireland

**Kurt Saetzler**, University of Ulster, UK

**Hiroshi Sako**, Hitachi, Japan

**Bryan Scotney**, University of Ulster, UK

**Andrew Shearer**, National University of Ireland, Galway, Ireland

**Mark Sugru**, Kinesense Ltd., Dublin, Ireland

**Paul Whelan**, Dublin City University, Ireland

**John Winder**, University of Ulster, UK

**Adam Winstanley**, National University of Ireland, Maynooth, Ireland

**WeiQi Yan**, Queen's University of Belfast, UK



# **STEREO MOTION AND OPTICAL FLOW**

# STEREO IMAGES FOR 3D FACE APPLICATIONS: A LITERATURE REVIEW

CLAUDIA ARELLANO AND ROZENN DAHYOT<sup>1</sup>

## Abstract

Stereo cameras are becoming increasingly available to customers at a more moderate cost. It is expected that this will impact upon face recognition processes used in applications such as indexing and retrieval in personal picture databases. In this paper we propose a review of the different techniques used for 3D face recognition and reconstruction. We emphasize the tendencies of both fields and how they have been integrated to allow new applications.

## 1. Introduction

Face recognition has been a very active research area during the last two decades, mainly for its potential in commercial and law enforcement applications. Most of the research in the early years has been done using 2D images but now, modern approaches aim at performing 3D face recognition. Indeed 3D modelling helps in dealing with variations in pose and illumination that are tricky to deal with in uncontrolled environments using only 2D images.

Figure 1 illustrates a three step face recognition system. First, data capture can be performed using laser scanners (which is one of the most accurate systems to acquire a dense 3D model but it requires a long exposure time, cooperation from the individual and remains too expensive a tool to enjoy widespread use), structured light technology (faster and cheaper but less accurate and contains more missing data), and multiple view reconstruction of the 3D face by using two or more 2D images. Stereo images are a very attractive alternative for 3D face reconstruction since this is a cheap, fast and passive data acquisition system. Dedicated

---

<sup>1</sup> Computer Sciences and Statistics, Trinity College of Dublin.  
Email: {Arellanc, Rozenn.Dahyot}@scss.tcd.ie

stereo recording hardware such as the 3D FinePix camera and the Minoru webcam are already available to consumers. This suggests that there is a market for developing applications for stereo images for example, in editing, indexing and retrieval in personal stereo images libraries.

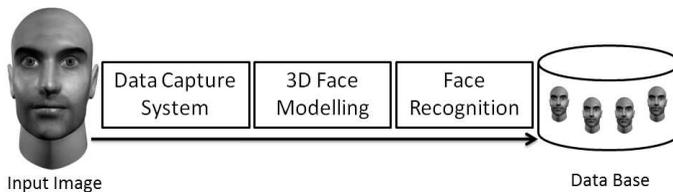


Figure 1. 3D Face Recognition Process

The contributions of this paper are to update previous literature reviews in 3D recognition performed up to 2007 [Abate2007, Gupta2007], explore the state of the art of stereo face reconstruction and to present a brief review of stereo applications over 3D face recognition. Section 2 is dedicated to stereo face reconstruction, while section 3 is a general review of 3D face recognition techniques. Finally section 4 presents some conclusions and open problems.

## 2. Stereo Face Reconstruction

3D Face reconstruction from 2D images has been explored using different approaches such as analysis by synthesis [Patel2009] and shape from: shading, texture, motion [DeCarlo2000] and stereo among others.

Stereo face reconstruction is not a trivial problem, since the calculation of the disparity map using conventional correlation based methods is very sensitive to the image texture and face is an almost textureless object. Lighting conditions and occlusions in the scene can also increase the complexity of stereo matching. To overcome these difficulties, two different approaches have been explored: adding prior information through geometrical constraints during the matching process and/or using post-processing techniques to improve the estimated shape of the face.

Methods of shape from shading and analysis by synthesis have improved thanks to using stereo images [Zhang1999]. Since shape from shading works well over textureless objects, it has been integrated into stereo algorithms [Fua1995, Samaras2000]. Cryer *et al.* for instance proposed a technique that integrates the high-frequency information from the shape from shading and the low frequency information from stereo

[Cryer1993, Cryer1995]. On the other hand, Lengagne *et al.* [Lengagne1996] use shape from shading constraints to generate the 3D face model during the matching process. Mixing concept from analysis by synthesis, Lengagne *et al.* [Lengagne2000] also propose the inclusion of a prior to help the reconstruction process by adding the differential information about the object shape and by constraining curvature values and crest lines. However, the overall process is performed at high computational cost.

Sung *et al.* propose an estimation of the facial shape and its motion using Stereo Active Appearance Model (STAAM) [Sung2006]. The computational efficiency is improved thanks to thin spline representation of the face which allowed Ionita *et al.* to propose a real time application for gaming [Ionita2009].

Zheng *et al.* propose the use of a 3D generic face as intermedium for correspondence, fitting each stereo image to the reference 3D face to synthesize a unique pose and estimate the depth map [Zheng2007]. Other analysis by synthesis approaches that include texture information over the reconstruction process have been explored by Morency *et al.* [Morency2002] and Romeiro *et al.* [Romeiro2007] respectively. For instance Romeiro *et al.* include a prior 3D Morphable model in shape and texture in the minimization cost function for the stereo matching, demonstrating the advantage of using texture information to deal with occlusions. Inclusion of prior information about face shape and texture improves performance of stereo reconstruction, but the accuracy of the recovered shape is inversely proportional to the computational speed. Performance of the recognition algorithm is directly related to the 3D shape representation as outlined in the following section.

### 3. 3D Face Recognition Techniques

The appearance of a face is described by its 3D shape and its albedo map, suggesting that, to overcome problems due to illumination, pose and expression variations, all the 3D face information should be used.

During the last decade several techniques in 3D recognition systems have been proposed as reported in the surveys by Kittler *et al.* [Kittler2005], Scheenstra *et al.* [Scheenstra2005], Bronstein *et al.* [Bronstein2005] and Abate *et al.* [Abate2007]. A more recent review written in 2007 by Gupta *et al.* [Gupta2007] classifies 3D recognition algorithms in two categories; appearance based and 'free form' based algorithms (Figure 2). We follow the same structure as Gupta *et al.* to review the most representative techniques in 3D face recognition including the new approaches that have

been proposed since 2007. In order to emphasize the role of stereo images in 3D face recognition application, this section is divided into two parts, general approaches are presented in the first part, while the second focuses on 3D recognition methods using stereo images.

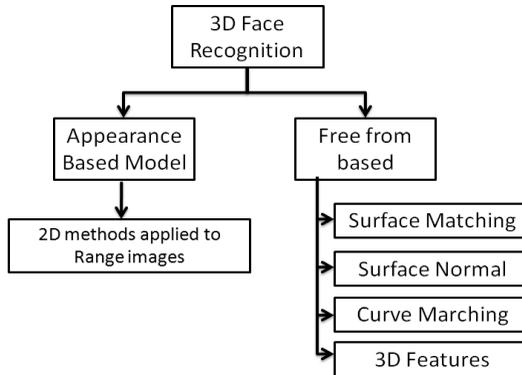


Figure 2. 3D Face Recognition algorithm classification [Gupta2007].

### 3.1. General algorithms for 3D Face Recognition

3D objects can be represented as a point cloud, a mesh grid or a range image. Range images (also known as 2,5D Images) are 2D images in which the depth information is encoded directly in the 2D image by replacing the intensity values with the depth value, so that the new pixel value corresponds to the surface geometry of the object.

#### 3.1.1. Appearance Based Models

Appearance based techniques use range images with traditional 2D recognition methods. The most common approaches are Principal Component Analysis (PCA), Linear Discriminant Analysis (LDA), Hidden Markov Models (HMM) among others. Whilst comparisons of using range images over 2D intensity alone have not shown sufficient evidence to classify them as better, there is a consensus that performance under pose variation is less affected in range image approaches making it more robust in such conditions.

### 3.1.2. 'Free form' Based Models

3D face Recognition algorithms using 'free form' models over point cloud and mesh representations have been explored in four main ways: Surface Matching, Surface Normal, Curve (or profile) Matching and Features classifications.

Surface based methods consist of comparing two face surfaces using a suitable metric after the registration and normalization of each surface. Hausdorff distance or Mean Square Errors are often used as similarity metrics. For registration, the Iterative Closest Point algorithm (ICP) is the most widely used algorithm [Amor2006, Besl1992, Cook2004]. Many variations and improvements of this algorithm have been proposed to overcome its sensitivity to noise and outliers when it is applied for face recognition. Weiwei *et al.* [Weiwei2009] have improved its robustness by using M-estimators. However their algorithm has difficulties in dealing with non rigid objects because it is based mainly on geometrical constraints. Lu *et al.* [Lu2005] introduce another modification by using thin plate spline (TPS) model to represent the non-rigid deformation reporting better performance over faces with varying facial expressions.

Amberg *et al.* [Amberg2008] uses a morphable model to fit the 3D face data through a non rigid ICP algorithm. The recognition step can be done either by comparing the face surface directly or by using the parameters of the morphable model obtained.

Surface normal has been used to define statistical models in describing facial shape and using it as a signature for face recognition. Some examples of these methods have been proposed by Smith *et al.* [Smith2005] and Tanaka *et al.* [Tanaka1996].

Curve matching recognition methods are based on the hypothesis that using the whole face surface is not necessary for recognition. Using just a few curves extracted from the facial surface can be enough to perform recognition, especially when the central vertical profile is used [Liposcak1999, Pan2005, Haar2008]. Combining curves with contour, Chao Li *et al.* [Li2005] report comparable results to those using Principal Component Analysis on 2,5D range images.

Several approaches using local and global features can also be found in the literature [Gunlu2009, Tang2009, Yunqi2009]. For example Gunlu *et al.* [Gunlu2009] present a feature extracted by the 3D discrete cosine transform (DCT) and Fourier Transform: the feature vector is composed by the most discriminative 3D transform coefficients. Using the nearest neighbour as classifier allows recognition rates above 99%. Lei Yunqi *et al.* [Yunqi2009] recently proposed a feature representation of face based on surface classification Image (SCI). The SCI is obtained from the

calculation of the Gaussian and mean curvature at each point of the face surface, and classifying them according to a gray scale intensity level. The recognition process is performed using the SCI as input for a PCA method and achieves better results than just applying PCA over the depth face image.

Even though most of the 3D recognition methods report performance of over 95% (on neutral expression) there is no comparison in the literature that allows us to establish some degree of real ranking or objective performance. Most of the experiments were carried out on different databases, and recorded under various conditions. It is strongly demonstrated however that 3D face representations improve results of 2D techniques when they are used in combination and also that 3D recognition methods perform better under pose variation conditions since the pose can be corrected before performing recognition [Bowyer2006]. In the last few years most of the focus has been in dealing with facial expression variation, some approaches addressing this problem can be found in Lu *et al.* [Lu2005] and Chang *et al.* [Chang2005], but this is still an open problem. For instance, Chang *et al.* perform recognition over regions that are only barely affected by facial expression, obtaining a recognition rate of 87%, which suggests that there is still room for improvement.

## **3.2. Stereo based 3D Face recognition algorithms**

Stereo information increases face recognition rates for human perception especially under transformation in perspective between the training and test image [Liu2005]. In this section we explore stereo based algorithms for face recognition in 3D performed by machines, following the same structure than the previous section.

### **3.2.1. Appearance Based Models**

Wang *et al.* [Wang2006, Wang2007] use stereo images for the generation of range images and recognition is performed using 2D Fisher Discriminant Analysis trained separately on depth information and intensity appearance. The best match corresponds to the minimum sum of the weighted discriminant Euclidean distance. Results show recognition rates of 95% when the algorithm is tested over a set of frontal view images (while using appearance or depth image separately, results are only 81% and 87% respectively).

Samanai *et al.* [Samani2006] also explore the combination of depth information and appearance image to improve recognition but using Principal Component Analysis over the disparity map and intensity values concatenated together in one feature vector. Results show a recognition rate of only 62% but the database used for testing includes pose, expression and illumination variations which make it more challenging.

### 3.2.2. 'Free form' Based Models

Hayasaka *et al.* [Hayasaka2006] propose a phase-based matching algorithm to find the correspondence in between the stereo pair using the information given by the 2D Fourier transform. To improve accuracy, they define an analytical function to estimate the sub pixel position of the correlation peak. The effects of the periodicity of the Fourier transform are avoided by using a windowing technique while a Gaussian filter is used to eliminate aliasing and noise [Uchida2005]. Surface registration is then performed using the ICP algorithm and the recognition is performed by taking the distance between the two facial data.

Fransens *et al.* [Fransens2005] use a morphable face model (shape and texture) taken from a set of 3D training images obtained with a laser scan. This model is used as a constraint during the minimization process of the stereo matching for both shape and texture (it can also be interpreted as prior information over the shape that is being reconstructed from the stereo pair). The face model parameters (for shape and texture) represent the feature vector to be compared with the database for recognition. Experiments were performed under different pose and lighting conditions, indicating that recognition rates increase by using shape and appearance together (compared with the same methods but using the shape feature vector or the texture vector alone), but the performance decreases when the orientation of the face is far from the frontal view.

Wu *et al.* [Wu2008] on the other hand generate the depth map by searching correspondence locally (divide the face in 5 regions according to its main features: eyes, mouth and nose) and matching it in the neighbourhood by cross correlation of image intensity over two pixel patched centred in each feature. The recognition method consists in the extraction of different features such as point cloud, surface normal, facial profile and PCA of depth image and merged them using a rank-based decision level fusion algorithm.

Rara *et al.* [Rara2009] investigate a recognition technique for subjects located at different distances (3, 15 and 33 meters) from the camera. A feature detection method is used for finding the eyes, nose and mouth centers to initialize an active appearance model and fitting it through an

inverse compositional image alignment algorithm (ICIA). The minimization of the error between the input images wrapped to a generic face mesh and the appearance model is performed to get the 3D face vertices. For recognition four methods are tested: feature vector computed with PCA on the 3D vertices; a goodness-of-fit criterion (after rigidly registering the 3D vertices of both images); feature vector from PCA of x-y plane projections of the 3D vertices and finally the goodness-of-fit criterion also in the x-y plane projections of the 3D vertices (after frontal pose normalization). Recognition performances using the x-y projection of the vertices report to be better and more stable to position variations than those based on the 3D vertices mesh.

Table 1 shows a summary with the key components of the methods described above, namely: the stereo matching algorithm used, the recognition technique, the database where the approaches were tested and their results. It is not possible to compare the results directly since experiments were conducted upon different database. Not only variations in pose, illumination, occlusion or facial expression in the database affect the performance, but also the quantity of images in the database and the presence/absence of impostor faces. With the exception of Wang *et al.*, [Wang2006], most stereo algorithms for face recognition use some prior information during the matching process or some specific constraints to restrict the area for searching correspondence.

### 3.2.3. Other approaches using stereo algorithms

Other approaches for face recognition that use stereo algorithms can be also found in literature. For instance trinocular stereo systems (3 images) have been reported by Lao *et al.* [Lao2000] and Chiba *et al.* [Chiba2004].

Lao *et al.* [Lao2000] propose the use of a modified segmented stereo based algorithm where the searching space is reduced by restricting it to isoluminance lines of the same intensity. To detect the pose and align the 3D model obtained from the stereo system an iris model is used to find its position and, using geometry, the angle of the face with respect to the frontal view is estimated. Once the 3D model is aligned to the frontal view the recognition process is performed by calculating the minimum distances between the face model and the database. Even though the algorithm does not generate a dense depth map of the face, it shows recognition rates above 90% when tested with different poses and illumination conditions.

Author	Stereo Algorithm	Recognition Algorithm	Database Characteristics						Results %
			Exp.	Illum.	Pose	Occlu	$N^o$ Subj./ Imag.		
Wang [47]		2D Fisher LDA	No	No	No	No	No	106/848	95
Samani [37]	Wavelet based algorithm [28]	PCA	Yes	Yes	Yes	Yes	Yes	22/1080	62.59
Hayasaka [18]	Phase-based algorithm [30]	ICP (Point to plane distance)	No	No	No	No	No	22/220(5775)*	N/R
Fransens [14]	Stereo matching using Morphable Models (texture and shape)	Feature Vector (model parameters)	No	No	Yes	No	No	70/700	82 – 100
Wu [50]	Cross Correlation	Feature vector						300	96.2
Rara [35, 34]	Stereo AAM	PCA and goodness-of-fit criterion	No	No	No	No	No	30(3 meters)	100
			No	No	No	No	No	30(15 meters)	90
			No	No	No	No	No	30(33 meters)	85

**Table 1. Summary of the stereo face recognition approaches.**

Chiba *et al.* [Chiba2004] applied feature matching recognition using a 3D face mesh as feature vector. Results are based on a very small dataset.

of images (10 subjects) where effects of pose and illumination variations are investigated.

Papatheodorou *et al.* [Papatheodorou2005] create a PCA model for recognition based in a trinocular data capture system. The shape recovered is registered to a standard template using the ICP algorithm and normalized by a B-spline approximation where a sphere is deformed into the face surface.

A novel approach using stereo for face recognition was recently proposed by Castillo *et al.* [Castillo2009]. Most reported previous works focused on recording images to reconstruct a 3D model. Castillo *et al.* realize that stereo correspondence algorithms can also be used as a measure of similarity between images: instead of performing explicitly 3D reconstruction, they use stereo matching techniques to compare two different images. This method proves to be invariant to pose variations (angle), since they calculate the epipolar constraints between the two images and defined the corresponding cost matching function.

## 4. Conclusions

It is clear from the literature reviewed that 3D face information improves recognition rates in pose variant environments. The main advantage of using stereo for 3D face reconstruction over using scanners is the viability for developing applications where no cooperation from the customer is needed, but there is still work to be done in terms of accuracy of the recognition methods. The use of multiple sources of information (e.g. inclusion of prior information such as shape model, morphable models or geometrical constrains) are leading to better results but challenges in dealing efficiently with lighting and expression variations remain.

## 5. Acknowledgments

This research is supported by Trinity College of Dublin (postgraduate Scholarship) and Government of Chile.

## 6. References

- [Abate2007] A. Abate, M. Nappi, D. Riccio, and G. Sabatino. 2d and 3d face recognition: A survey. In *Pattern Recognition Letters*, volume 28, pages 1885 – 1906, 2007.
- [Amberg2008] B. Amberg, R. Knothe, and T. Vetter. Shape based face recognition with a morphable model. In *IEEE International Conference on Shape Modeling and Applications, SMI*, pages 253 –254, 2008.
- [Amor2006] B. Amor, M. Ardabilian, and L. Chen. New experiments on icp-based 3d face recognition and authentication. In *International Conference on Pattern Recognition*, volume 3, pages 1195 –1199, 2006.
- [Besl1992] P. Besl and N. McKay. A method for registration of 3-d shapes. In *IEEE Transactions on Pattern Analysis and Machine Intelligence*, volume 14, pages 239–256, 1992.
- [Bowyer2006] K. Bowyer, K. Chang, and P. Flynn. A survey of approaches and challenges in 3d and multi-modal 3d + 2d face recognition. In *Computer Vision and Image Understanding*, volume 101, pages 1 – 15, 2006.
- [Bronstein2005] E. Bronstein, M. Bronstein, and R. Kimmel. Three-dimensional face recognition. In *International Journal of Computer Vision*, volume 64, pages 5–30, 2005.
- [Castillo2009] C. Castillo and D. Jacobs. Using stereo matching with general epipolar geometry for 2d face recognition across pose. In *IEEE Transactions on Pattern Analysis and Machine Intelligence*, volume 31, pages 2298 –2304, 2009.
- [Chang2005] K. Chang, K. Bowyer, and P. Flynn. Adaptive rigid multi-region selection for handling expression variation in 3d face recognition. In *Computer Vision and Pattern Recognition - Workshop*, pages 157 –165, 2005.
- [Chiba2004] N. Chiba and H. Hanaizumi. Three-dimensional face recognition system - system configuration. In *SICE Annual Conference*, volume 2, pages 1192 – 1195, 2004.
- [Cook2004] J. Cook, V. Chandran, S. Sridharan, and C. Fookes. Face recognition from 3d data using iterative closest point algorithm and gaussian mixture models. In *2nd International Symposium on 3D Data Processing, Visualization and Transmission*, pages 502 – 509, 2004.
- [Cryer1993] J. Cryer, P. Tsai, and M. Shah. Integration of shape from x modules: combining stereo and shading. In *Computer Vision and Pattern Recognition, CVPR*, pages 720 –721, 1993.

- [Cryer1995] J. Cryer, P. Tsai, and M. Shah. Integration of shape from shading and stereo. In *Pattern Recognition*, volume 28, pages 1033 – 1043, 1995.
- [DeCarlo2000] D. DeCarlo and D. Metaxas. Optical flow constraints on deformable models with applications to face tracking. In *International Journal of Computer Vision*, pages 99–127, 2000.
- [Fransens2005] R. Fransens, C. Strecha, and L. Van-Gool. Parametric stereo for multi-pose face recognition and 3d-face modeling. In *Second International Workshop in Analysis and Modelling of Faces and Gestures*, pages 109–124, 2005.
- [Fua1995] P. Fua and Y. Leclerc. Object-centered surface reconstruction: Combining multi-image stereo and shading. In *International Journal of Computer Vision*, volume 16, pages 35–56, 1995.
- [Gunlu2009] G. Gunlu and H. Bilge. Feature extraction and discriminating feature selection for 3d face recognition. In *24th International Symposium on Computer and Information Sciences, ISCIS*, pages 44 – 49, 2009.
- [Gupta2007] S. Gupta, M. K. Markey, and A. C. Bovik. Advances and challenges in 3d and 2d+3d human face recognition. In *Pattern Recognition Theory and Application*, 2007.
- [Hayasaka2006] A. Hayasaka, T. Shibahara, K. Ito, T. Aoki, H. Nakajima, and K. Kobayashi. A 3d face recognition system using passive stereo vision and its performance evaluation. In *International Symposium on Intelligent Signal Processing and Communications, ISPACS*, pages 379 –382, 2006.
- [Ionita2009] M. Ionita, I. Andorko, and P. Corcoran. Enhanced real-time face models from stereo imaging for gaming applications. In *International IEEE Consumer Electronics Society’s Games Innovations Conference, ICE-GIC*, pages 17 –24, 2009.
- [Kittler2005] J. Kittler, A. Hilton, M. Hamouz, and J. Illingworth. 3d assisted face recognition: A survey of 3d imaging, modelling and recognition approaches. In *Computer Vision and Pattern Recognition, CVPR*, pages 114 –121, 2005.
- [Lao2000] S. Lao, Y. Sumi, M. Kawade, and F. Tomita. 3d template matching for pose invariant face recognition using 3d facial model built with isoluminance line based stereo vision. In *15th International Conference on Pattern Recognition*, volume 2, pages 911 –916, 2000.
- [Lengagne2000] R. Lengagne, P. Fua, and O. Monga. 3d stereo reconstruction of human faces driven by differential constraints. In *Image and Vision Computing*, volume 18, pages 337 – 343, 2000.

- [Lengagne1996] R. Lengagne, J. Tarel, and O. Monga. From 2d images to 3d face geometry. In *Proceedings of the Second International Conference on Automatic Face and Gesture Recognition*, pages 301 – 306, 1996.
- [Li2005] C. Li, A. Barreto, J. Zhai, and C. Chin. Exploring face recognition by combining 3d profiles and contours. In *SoutheastCon Proceedings*. IEEE, pages 576 – 579, 2005.
- [Liposcak1999] Z. Liposcak and S. Loncaric. Face recognition from profiles using morphological operations. In *International Workshop on Recognition, Analysis, and Tracking of Faces and Gestures in Real-Time Systems*, pages 47 –52, 1999.
- [Liu2005] C. Liu and J. Ward. The use of 3d information in face recognition. In *Vision Research*, volume 46, pages 768 – 773, 2006.
- [Lu2005] X. Lu and A. Jain. Deformation analysis for 3d face matching. In *Seventh IEEE Workshops on Application of Computer Vision, WACV/MOTIONS*, volume 1, pages 99 –104, 2005.
- [Magarey1998] J. Magarey and A. Dick. Multiresolution stereo image matching using complex wavelets. In *Fourteenth International Conference on Pattern Recognition*, volume 1, pages 4 –7, 1998.
- [Morency2002] L. Morency, A. Rahimi, and T. Darrell. Fast 3d model acquisition from stereo images. In *First International Symposium on 3D Data Processing Visualization and Transmission*, pages 172 – 176, 2002.
- [Muquit2006] M. Muquit, T. Shibahara, and T. Aoki. A high-accuracy passive 3d measurement system using phase-based image matching. volume E89-A, pages 686–697, 2006.
- [Pan2005] G. Pan, L. Zheng, and Z. Wu. Robust metric and alignment for profile-based face recognition: An experimental comparison. In *Seventh IEEE Workshops on Application of Computer Vision, WACV/MOTIONS*, volume 1, pages 117 –122, 2005.
- [Papatheodorou2005] T. Papatheodorou and D. Rueckert. Evaluation of 3d face recognition using registration and pca. In *Lecture Notes in Computer Science*, volume 3296, pages 1783 –1797, 2005.
- [Patel2009] A. Patel and W. Smith. 3d morphable face models revisited. In *IEEE Conference on Computer Vision and Pattern Recognition, CVPR*, pages 1327 –1334, 2009.
- [Rara2009] H. Rara, S. Elhabian, A. Ali, M. Miller, T. Starr, and A. Farag. Distant face recognition based on sparse-stereo reconstruction. In *16th IEEE International Conference on Image Processing (ICIP)*, pages 4141 –4144, 2009.

- [Rara2009] H. Rara, S. Elhabian, A. Ali, M. Miller, T. Starr, and A. Farag. Face recognition at-a-distance based on sparse-stereo reconstruction. In IEEE Computer Society Conference on Computer Vision and Pattern Recognition Workshops, CVPR, pages 27–32, 2009.
- [Romeiro2007] F. Romeiro and T. Zickler. Model-based stereo with occlusions. In Proceedings of the 3rd international conference on Analysis and modeling of faces and gestures, AMFG, pages 31–45, 2007.
- [Samani2006] A. Samani, J. Winkler, and M. Niranjan. Automatic face recognition using stereo images. In IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP, volume 5, pages V913–V916, 2006.
- [Samaras2000] D. Samaras, D. Metaxas, P. Fua, and Y. Leclerc. Variable albedo surface reconstruction from stereo and shape from shading. In Conference on Computer Vision and Pattern Recognition, CVPR, volume 1, pages 480–487, 2000.
- [Scheenstra2005] A. Scheenstra, A. Ruifrok, and R. C. Veltkamp. A survey of 3d face recognition methods. In Lecture Notes in Computer Science, pages 891–899, 2005.
- [Smith2005] W. Smith and E. Hancock. Face recognition using a surface normal model. In 13th International Conference on Image Analysis and Processing ,ICIAP, pages 423–430, 2005.
- [Sung2006] J. Sung and D. Kim. Estimating 3d facial shape and motion from stereo image using active appearance models with stereo constraints. In Third International Conference on Image Analysis and Recognition, ICIAR, pages 457–467, 2006.
- [Sung2006] J. Sung and D. Kim. Staam: Fitting a 2d+3d aam to stereo images. In IEEE International Conference on Image Processing, pages 2781–2784, 2006.
- [Tanaka1996] H. Tanaka and M. Ikeda. Curvature-based face surface recognition using spherical correlation-principal directions for curved object recognition. In Proceedings of the 13th International Conference on Pattern Recognition, volume 3, pages 638–642, 1996.
- [Tang2009] H. Tang, Y. Sun, B. Yin, and Y. Ge. Self-adaptive 3d face recognition based on feature division. In Fifth International Conference on Image and Graphics, ICIIG, pages 885–890, 2009.
- [Haar2008] F. ter Haar and R. Veltkamp. A 3d face matching framework. In IEEE International Conference on Shape Modeling and Applications, SMI, pages 103–110, 2008.
- [Uchida2005] N. Uchida, T. Shibahara, T. Aoki, H. Nakajima, and K. Kobayashi. 3d face recognition using passive stereo vision. In IEEE

- International Conference on Image Processing, ICIP, volume 2, pages 950–953, 2005.
- [Wang2006] J. Wang, H. Kong, and W.-Y. Yau. Bilateral two dimensional linear discriminant analysis for stereo face recognition. In 18th International Conference on Pattern Recognition, ICPR, volume 1, pages 429–432, 2006.
- [Wang2007] J. Wang, E. Lim, X. Chen, and R. Venkateswarlu. Real-time stereo face recognition by fusing appearance and depth fisherfaces. In Journal of VLSI Signal Processing Systems for Signal, Image and Video Technology, volume 49, pages 409–423, 2007.
- [Weiwei2009] Y. Weiwei. Fast and robust image registration for 3d face modeling. In Asia-Pacific Conference on Information Processing, APCIP, volume 2, pages 23 –26, 2009.
- [Wu2008] X. Wu, C. Dai, and J. Liu. A novel approach for face recognition based on stereo image processing algorithm. In International Conference on Audio, Language and Image Processing, ICALIP, pages 1245 –1249, 2008.
- [Yunqi2009] L. Yunqi, C. Dongjie, Y. Meiling, L. Qingmin, and S. Zhenxiang. 3d face recognition by surface classification image and pca. In Second International Conference on Machine Vision, ICMV, pages 145 –149, 2009.
- [Zhang1999] R. Zhang, P. Tsai, J. Cryer, and M. Shah. Shape-from-shading: a survey. In IEEE Transactions on Pattern Analysis and Machine Intelligence, volume 21, pages 690 –706, 1999.
- [Zheng2007] Y. Zheng, J. Chang, Z. Zheng, and Z. Wang. 3d face reconstruction from stereo: A model based approach. In IEEE International Conference on Image Processing, ICIP, volume 3, pages 65–68, 2007.

# 3D OPTICAL FLOW FROM SINGLE AND DUAL DOPPLER RADARS

YONG ZHANG, JOHN L. BARRON  
AND ROBERT E. MERCER<sup>1</sup>

## Abstract

We present a 3D Optical Flow application using a regularization method to recover 3D wind velocity quantitatively from synthetic data and qualitatively from real data for both single and dual 3D Doppler Radars. By dual Doppler data we mean data from 2 separate but overlapping Doppler radars (the area of overlap is known from geometry to be a lens). Our algorithm easily extends to multi-radars but we do not have any real data corresponding to this case. Our algorithm regularizes terms consisting of a radial velocity constraint, a local velocity smoothness constraint and a least squares consistency constraint. We describe how we generated “realistic” synthetic data for our experiments and we give several error metrics we use in our quantitative error analysis. We also present 3D optical flow results for the overlapping Doppler data from radar stations in Detroit and Cleveland. We demonstrate that optical flow calculated by regularization from dual radars is quantitatively and qualitatively better than optical flow calculated from single radars and that regularization is better than least squares for both single and dual radars.

## 1. Introduction

Doppler radar is an important meteorological observation tool for detecting and tracking severe weather phenomena. Much research has been devoted to retrieving 3D full velocity from the observed radial velocity

---

<sup>1</sup> Department of Computer Science, The University of Western Ontario, Canada, N6A 5B7. Email: {yzhan433,barron,merc} @csd.uwo.ca

(Lhermitte and Atlas [Lhermitte1961], Easterbrook [Easterbrook1975] and Waldteufel and Corbin [Waldteufel1979]).

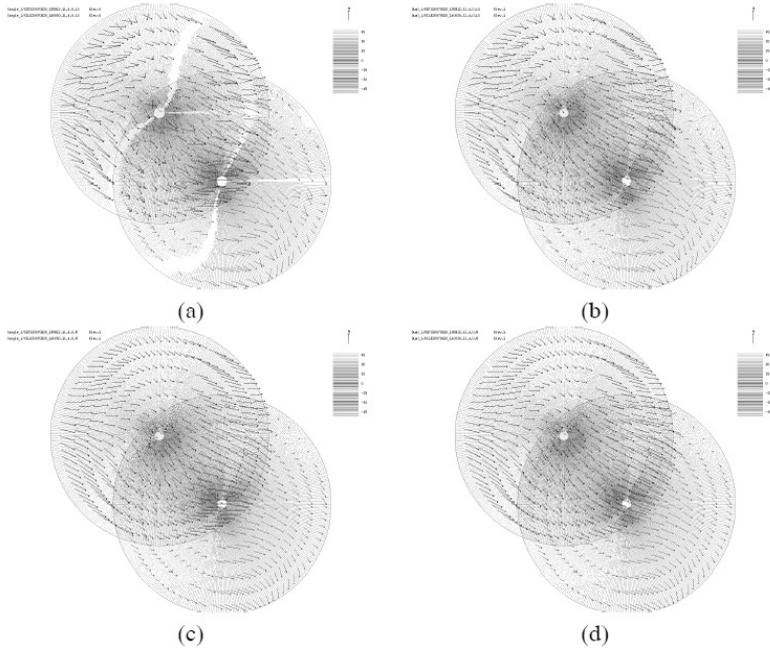


Figure 1. The (a) single and the (b) dual least squares UV flow fields and the (c) single and the dual regularized UV flow fields for variation level  $K = 5$  and 20% noise for then  $\vec{V}_{Base2} = (20,10,5)$  synthetic data.

Little quantitative analysis of this work is available (and there is no common test data used or available) making comparisons difficult.

Rather than using the traditional methods provided by meteorologists, our research team is using the 3D Optical Flow framework ([Barron2005]) to measure 3D velocity. 3D optical flow (3D velocity) is a simple extension of 2D optical flow. We have already demonstrated a Horn and Schunck like least squares regularization calculation [Horn1981] that uses a least squares constraint [Lucas1981] on real data from a single Doppler radar NEXRADI dataset [Chen2001, Barron2005]. Both NEXRADI and NEXRADII (used here) Doppler datasets consist of number (15-16) of cones of data where each cone wall has a different but constant angle ( $0^\circ$  to